



20W - 380W

CUSTOMIZED SIZE  
SOLAR PANEL

More  
**+ Power**  
Less Expense

**SunMaster Solar Co., Ltd**

Add: No. 2819, Haitang East Road, Jinhua Zhejiang China

**Europe Branch:**

Via Angelo Moro 61, San Donato Milanese, Italy

Mob: +86 139 6796 1680


Whats APP: +86 139 6796 1680

Mob: +39 348 350 4129

Web: [www.chinasunmaster.com](http://www.chinasunmaster.com)

Mail: [info@chinasunmaster.com](mailto:info@chinasunmaster.com)

Mail: [export@chinasunmaster.com](mailto:export@chinasunmaster.com)

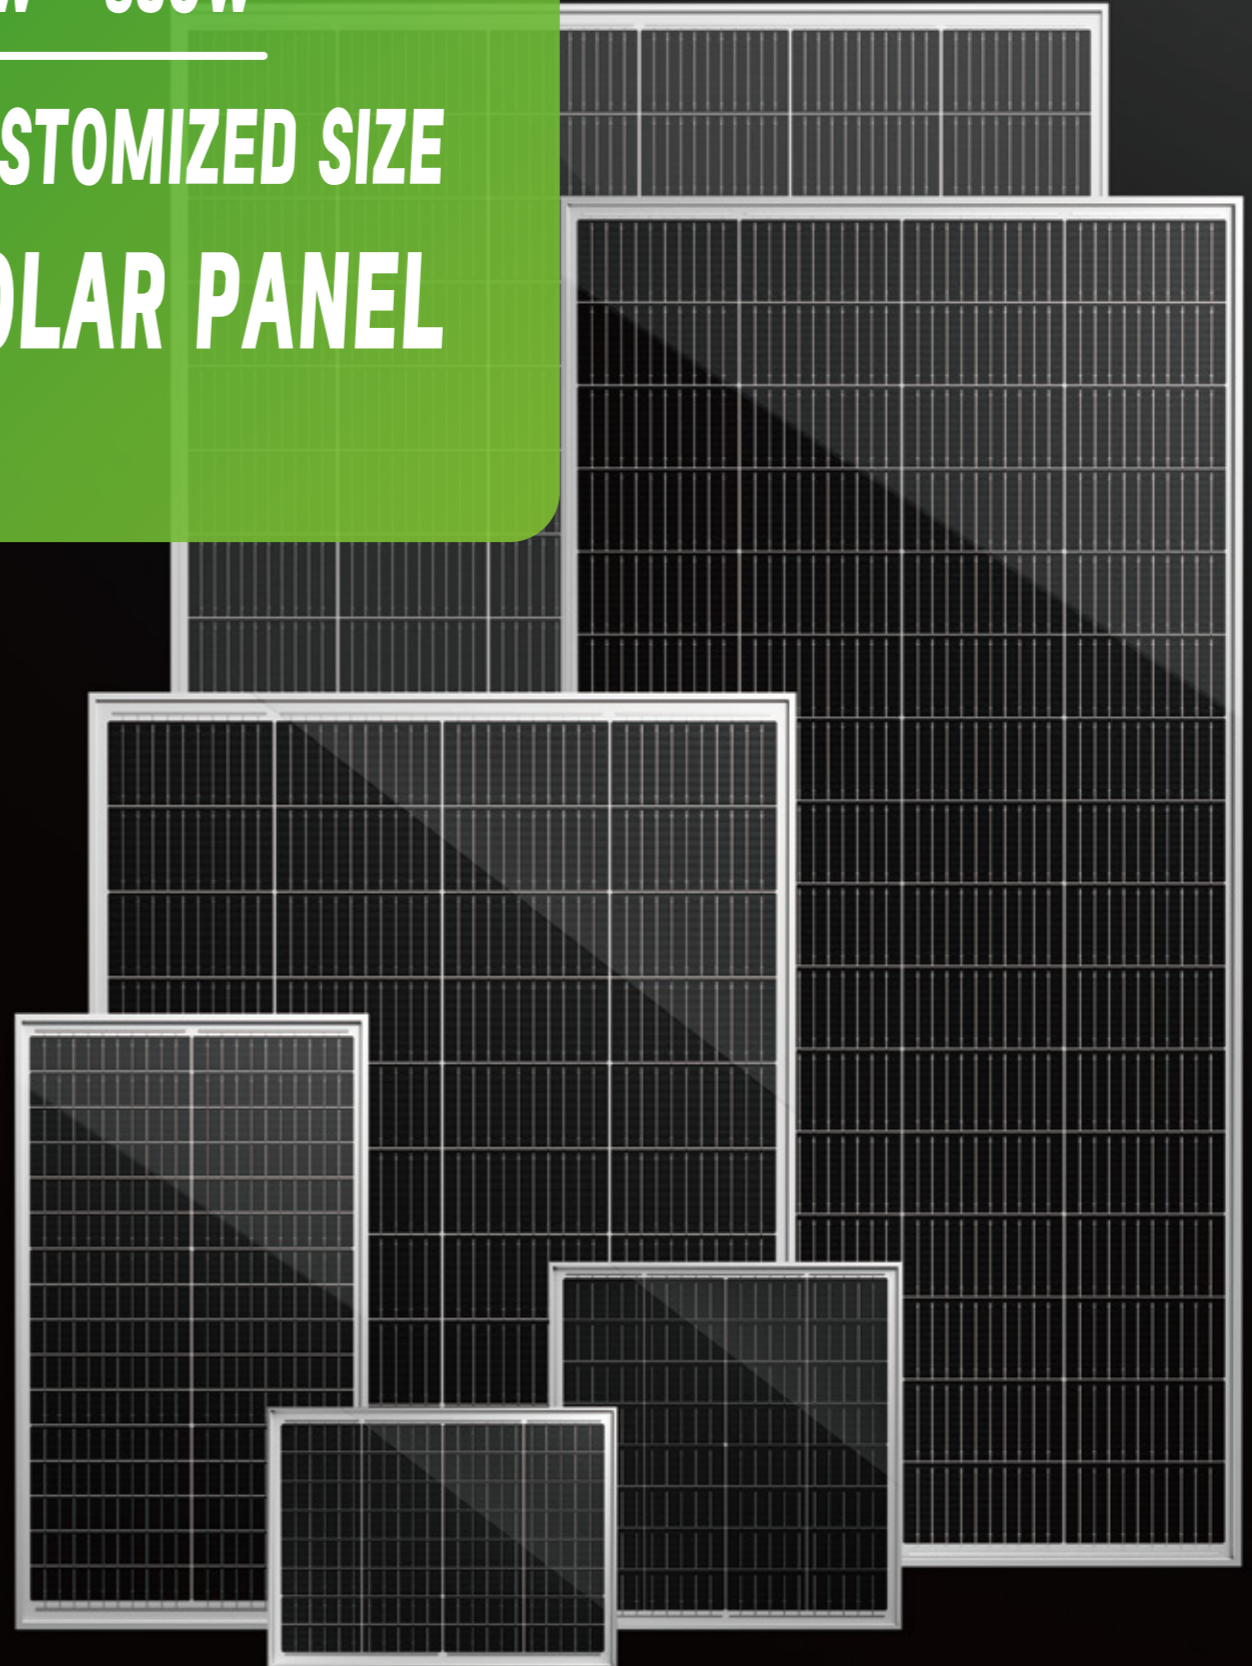

## Company Overview

It's a company specializing in providing solar panels, off-grid photovoltaic solutions, solar street lights, wind and solar hybrid lamps, small and medium-sized solar power generation systems, solar home lighting and other products.



## What SunMaster Technology offer :



Pre-sales services

- ✓ Free customized design of optimum solar system
- ✓ Free Dialux simulation drawing
- ✓ Free consultation and design lighting solutions



After-sales services

- ✓ Offer detail installation instruction and documentation
- ✓ Offer training and test & commissioning
- ✓ Long-life technology support and warranty




SunMaster 1


# SM330-380M

182mm Cells Mono  
PERC with MBB & Half-cut  
Technology

## Quality Guarantee

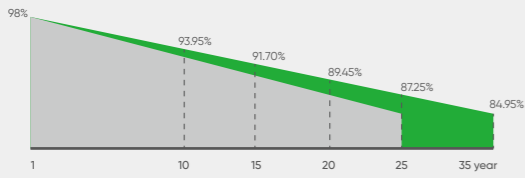

▶ Sunmaster solar linear power output guarantee  
▶ Standard linear power output guarantee

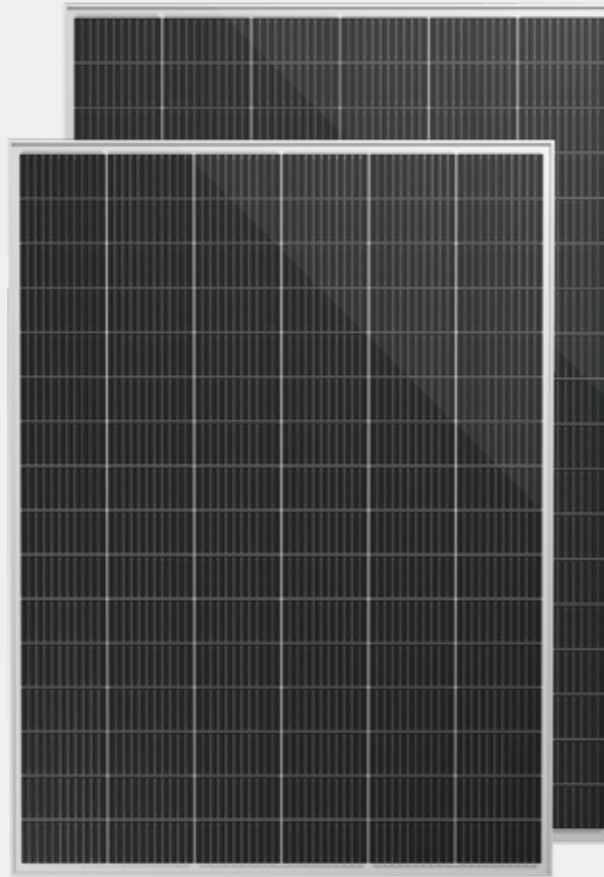

**330-380W** -0.55% power attenuation **30years** Power warranty

## Comprehensive Products and System Certificates



IEC 61215 / IEC 61730 / CE / INMETRO

ISO 9001-

2015/Quality management system

ISO 14001-

2015/Standards for environmental management system

ISO 45001-

2018/International standards for occupational health & safety

## Key Features

- High Power Output:** Mono crystalline 28-cell module achieves a power output up to 40Wp.
- PID RESISTANT:** SunMaster modules pass PID test, limited power degradation by PID test is guaranteed for mass production.
- Low-light Performance:** Advanced glass and surface texturing allow for excellent performance in low-light environments.
- Severe Weather Resilience:** Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).
- Durability against extreme environmental conditions:** With high salt mist and ammonia resistance.
- Temperature Coefficient:** Improved temperature coefficient decreases power loss during high temperatures.

## ELECTRICAL DATA (STC)\*

Module type	SM330M	SM350M	SM360M	SM380M
Nominal power watt Pmax(W)	330W	350W	360W	380W
Power output tolerance Pmax(%)	0~+5%			
Maximum power voltage Vmp(V)	27.8V	28.8V	29.2V	31.3V
Maximum power current Imp(A)	11.88A	12.16A	12.33A	12.15A
Open circuit Voltage Voc(V)	34.8V	35.2V	38.3V	38.3V
Short circuit current Ioc(A)	12.32A	12.90A	12.22A	12.89A
Module efficiency(%)	18.9%	20.4%	20.6%	20.4%
Module dimension	1540x1134x30mm	1540x1134x30mm	1540x1134x30mm	1722x1134x30mm
Solar cells	Mono 182x91			
Cells orientation	96(6x16)	96(6x16)	96(6x16)	108(6x18)
Weight	16.7kg±5%	16.7kg±5%	16.7kg±5%	18.7kg±5%

\*STC(Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, AM 1.5

\*The data above is for reference only and the actual data is in accordance with the practical testing

## ELECTRICAL DATA NOCT \*

Maximum power pmax(Wp)	244W	259W	266.4W	281.2W
Maximum power point voltage Vmp(V)	24.8V	25.8V	26.2V	28.3V
Maximum power point current Imp(A)	9.83A	10.04A	10.16A	9.93A
Open circuit Voltage Voc(V)	31.8V	32.2V	35.3V	35.3V
Short circuit current Ioc(A)	9.97A	10.45A	9.82A	10.35A

\*NOCT(Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, AM 1.5

\*The data above is for reference only and the actual data is in accordance with the practical testing

## TEMPERATURE RATINGS

NOCT	43°C ±2°C
Temperature coefficient of Pmax	-0.36%/K
Temperature coefficient of Voc	-0.28%/K
Temperature coefficient of Isc	0.05%/K

## Mechanical Characteristics

Glass	High transparency, low iron, tempered
Junction box	IP 66, 3 diodes
Cables	4mm <sup>2</sup> , 900mm
Connectors	MC4-compatible


## WORKING CONDITIONS

Maximum system voltage	1000 /1500 V DC
Operating temperature	-40°C ~+85°C
Maximum series fuse	15A
Maximum load(snow/wind)	5400 Pa / 2400 Pa


## PACKAGING INFORMATION

Packing type	carton
Box	2pcs/box

## PACKAGING INFORMATION

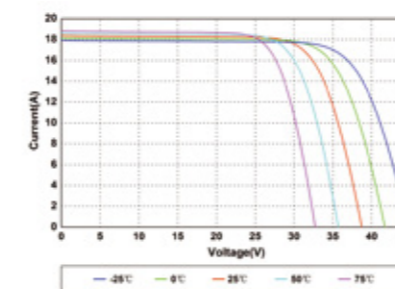

Current-Voltage and Power-Voltage Curves at Different Irradiances

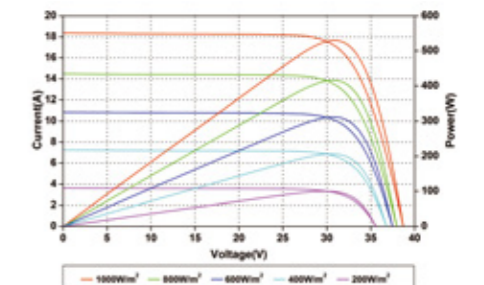


Current-Voltage Curves at Different Temperatures


SunMaster 2

# SM250-300M

182mm Cells Mono  
PERC with MBB & Half-cut  
Technology

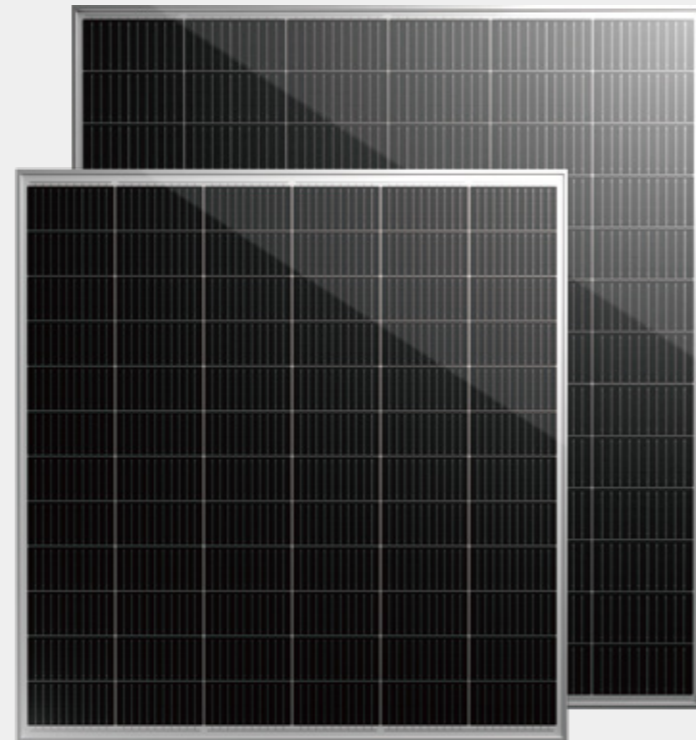

## Quality Guarantee

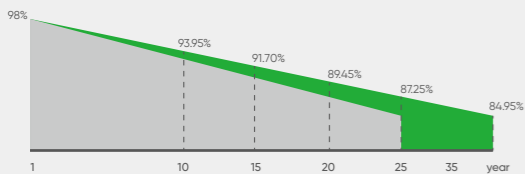

▶ Sunmaster solar linear power output guarantee  
▶ Standard linear power output guarantee

**250-300W** -0.55% power attenuation 30years Power warranty

## Comprehensive Products and System Certificates



IEC 61215 / IEC 61730 / CE / INMETRO  
ISO 9001-  
2015/Quality management system  
ISO 14001-  
2015/Standards for environmental management system  
ISO 45001-  
2018/International standards for occupational health & safety

## Key Features

- High Power Output:** Mono crystalline 28-cell module achieves a power output up to 40Wp.
- PID RESISTANT:** SunMaster modules pass PID test, limited power degradation by PID test is guaranteed for mass production.
- Low-light Performance:** Advanced glass and surface texturing allow for excellent performance in low-light environments.
- Severe Weather Resilience:** Certified to withstand wind load (2400 Pascal) and snow load (5400 Pascal).
- Durability against extreme environmental conditions:** With high salt mist and ammonia resistance.
- Temperature Coefficient:** Improved temperature coefficient decreases power loss during high temperatures.

## ELECTRICAL DATA (STC)\*

Module type	SM250M	SM270M	SM280M	SM300M
Nominal power watt Pmax(W)	250W	270W	280W	300W
Power output tolerance Pmax(%)	0~+5%			
Maximum power voltage Vmp(V)	41.7V	41.7V	41.7V	24.3V
Maximum power current Imp(A)	6.0A	6.48A	6.72A	12.35A
Open circuit Voltage Voc(V)	47.1V	44.7V	44.7V	30.9V
Short circuit current Ioc(A)	7.21A	7.67A	7.95A	12.6A
Module efficiency(%)	19.0%	20.4%	21.2%	19.4%
Module dimension	1160x1134x30mm	1160x1134x30mm	1160x1134x30mm	1360x1134x30mm
Solar cells	Mono 182x91			
Cells orientation	72(6x12)	72(6x12)	72(6x12)	84(6x14)
Weight	12.6kg±5%	12.6kg±5%	12.6kg±5%	15kg±5%

\*STC(Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Module Temperature 25 °C, AM 1.5  
\*The data above is for reference only and the actual data is in accordance with the practical testing

## ELECTRICAL DATA NOCT \*

Maximum power pmax(Wp)	186.5W	201.4W	201.4W	222W
Maximum power point voltage Vmp(V)	38.7V	38.7V	38.7V	21.3V
Maximum power point current Imp(A)	4.82A	5.2A	5.2A	10.4A
Open circuit Voltage Voc(V)	44.1V	41.7V	41.7V	27.9V
Short circuit current Ioc(A)	5.79A	6.27A	6.27A	10.5A

\*NOCT(Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20 °C, AM 1.5  
\*The data above is for reference only and the actual data is in accordance with the practical testing

## TEMPERATURE RATINGS

NOCT	43 °C ±2 °C
Temperature coefficient of Pmax	-0.36%/K
Temperature coefficient of Voc	-0.28%/K
Temperature coefficient of Isc	0.05%/K

## Mechanical Characteristics

Glass	High transparency, low iron, tempered
Junction box	IP 66, 3 diodes
Cables	2.5mm <sup>2</sup> , 900mm
Connectors	MC4-compatible


## WORKING CONDITIONS

Maximum system voltage	1000 /1500 V DC
Operating temperature	-40 °C ~+85 °C
Maximum series fuse	15A
Maximum load(snow / wind)	5400 Pa / 2400 Pa


## PACKAGING INFORMATION

Packing type	carton
Box	2pcs/box

## PACKAGING INFORMATION

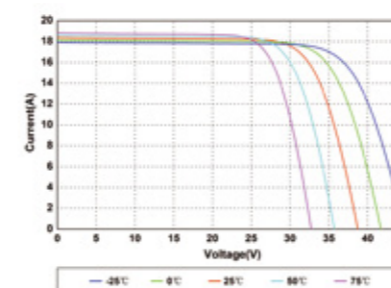

Current-Voltage and Power-Voltage Curves at Different Irradiances

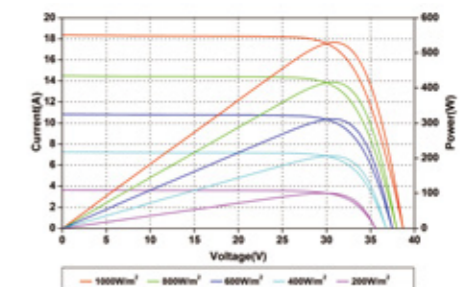


Current-Voltage Curves at Different Temperatures

SunMaster 3


# SM160-240M

182mm Cells Mono  
PERC with MBB & Half-cut  
Technology

## Quality Guarantee

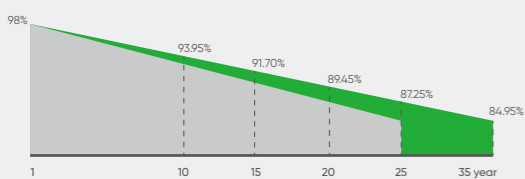

▶ Sunmaster solar linear power output guarantee  
▶ Standard linear power output guarantee

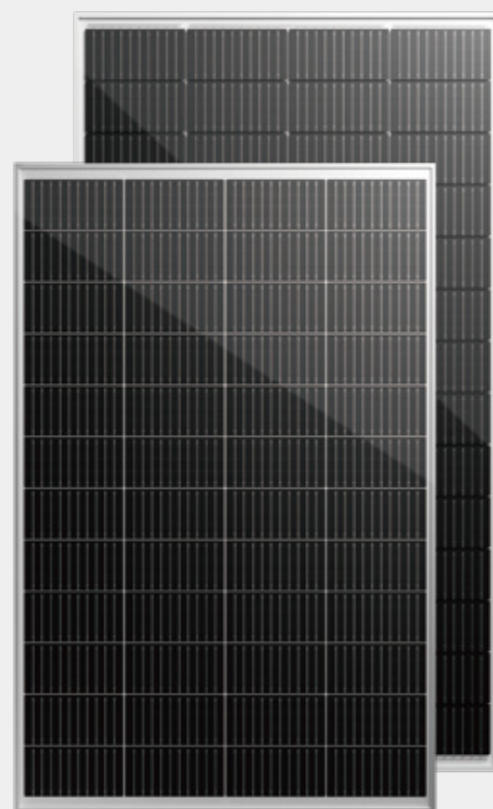

**160-240W**    **-0.55%**    **30years**  
power attenuation    Power warranty

## Comprehensive Products and System Certificates



IEC 61215 / IEC 61730 / CE / INMETRO  
ISO 9001-  
2015/Quality management system  
ISO 14001-  
2015/Standards for environmental management system  
ISO 45001-  
2018/International standards for occupational health & safety

## Key Features

- High Power Output:** Mono crystalline 28-cell module achieves a power output up to 40Wp.
- PID RESISTANT:** SunMaster modules pass PID test, limited power degradation by PID test is guaranteed for mass production.
- Low-light Performance:** Advanced glass and surface texturing allow for excellent performance in low-light environments.
- Severe Weather Resilience:** Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).
- Durability against extreme environmental conditions:** With high salt mist and ammonia resistance.
- Temperature Coefficient:** Improved temperature coefficient decreases power loss during high temperatures.

## ELECTRICAL DATA (STC)\*

Module type	SM160M	SM180M	SM200M	SM220M	SM240M
Nominal power watt Pmax(W)	160W	180W	200W	220W	240W
Power output tolerance Pmax(%)	0~+5%				
Maximum power voltage Vmp(V)	25.5V	27.8V	32.4V	32.4V	37.1V
Maximum power current Imp(A)	6.28A	6.48A	6.18A	6.49A	6.46A
Open circuit Voltage Voc(V)	28.5V	30.8V	35.4V	35.4V	44.2V
Short circuit current Ioc(A)	7.12A	7.42A	7.17A	7.53A	6.89A
Module efficiency(%)	19.7%	20.2%	19.5%	20.4%	20.5%
Module dimension	1070x760x30mm	1160x760x30mm	1350x760x30mm	1350x760x30mm	1535x760x30mm
Solar cells	Mono 182x91				
Cells orientation	44(4x11)	48(4x12)	56(4x14)	56(4x14)	64(4x16)
Weight	7.8kg±5%	8.5kg±5%	9.8kg±5%	9.8kg±5%	11.2kg±5%

\*STC(Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, AM 1.5  
\*The data above is for reference only and the actual data is in accordance with the practical testing

## ELECTRICAL DATA NOCT \*

Maximum power pmax(Wp)	118.4W	133.2W	148W	155.4W	177.6W
Maximum power point voltage Vmp(V)	22.5V	24.8V	29.4V	29.4V	34.1V
Maximum power point current Imp(A)	5.26A	5.37A	5.03A	5.29A	5.2A
Open circuit Voltage Voc(V)	25.5V	27.8V	32.4V	32.4V	41.2V
Short circuit current Ioc(A)	6.03A	8.44A	5.93A	6.23A	5.43A

\*NOCT(Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, AM 1.5  
\*The data above is for reference only and the actual data is in accordance with the practical testing

## TEMPERATURE RATINGS

NOCT	43°C ±2°C
Temperature coefficient of Pmax	-0.36%/K
Temperature coefficient of Voc	-0.28%/K
Temperature coefficient of Isc	0.05%/K

## Mechanical Characteristics

Glass	High transparency, low iron, tempered
Junction box	IP 66, 3 diodes
Cables	2.5mm <sup>2</sup> , 900mm
Connectors	MC4-compatible


## WORKING CONDITIONS

Maximum system voltage	1000 /1500 V DC
Operating temperature	-40°C ~+85°C
Maximum series fuse	15A
Maximum load(snow/wind)	5400 Pa / 2400 Pa


## PACKAGING INFORMATION

Packing type	carton
Box	2pcs/box

## PACKAGING INFORMATION

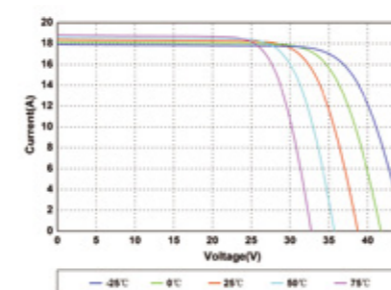

Current-Voltage and Power-Voltage Curves at Different Irradiances

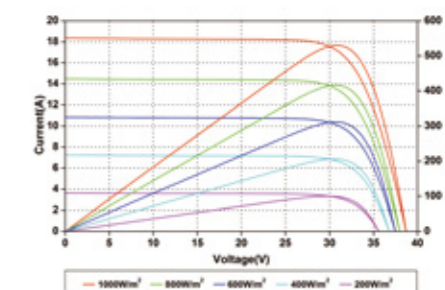


Current-Voltage Curves at Different Temperatures


SunMaster 4

# SM100-150M

182mm Cells Mono  
PERC with MBB & Half-cut  
Technology

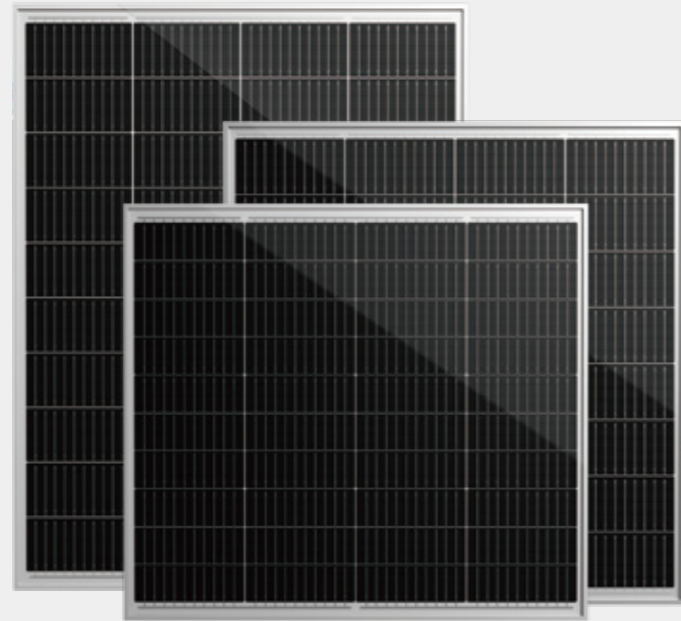

## Quality Guarantee

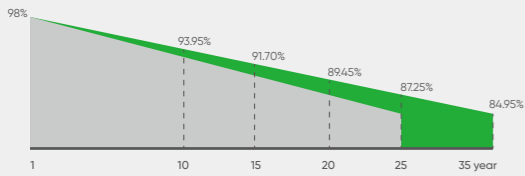

▲ Sunmaster solar linear power output guarantee  
▶ Standard linear power output guarantee

**100-150W** -0.55% power attenuation **30years** Power warranty

Comprehensive  
Products and System Certificates



IEC 61215 / IEC 61730 / CE / INMETRO

ISO 9001-

2015/Quality management system

ISO 14001-

2015/Standards for environmental management system

ISO 45001-

2018/International standards for occupational health & safety

## Key Features

**High Power Output:**  
Mono crystalline 28-cell module achieves a power output up to 40Wp.

**PID RESISTANT:**  
SunMaster modules pass PID test, limited power degradation by PID test is guaranteed for mass production.

**Low-light Performance:**  
Advanced glass and surface texturing allow for excellent performance in low-light environments.

**Severe Weather Resilience:**  
Certified to withstand wind load (2400 Pascal) and snow load (5400 Pascal).

**Durability against extreme environmental conditions:**  
With high salt mist and ammonia resistance

**Temperature Coefficient:**  
Improved temperature coefficient decreases power loss during high temperatures.

## ELECTRICAL DATA (STC)\*

Module type	SM100M	SM120M	SM150M
Nominal power watt Pmax(W)	100W	120W	150W
Power output tolerance Pmax(%)	0~+5%		
Maximum power voltage Vmp(V)	23.2V	18.5V	23.2V
Maximum power current Imp(A)	4.32A	6.48A	6.46A
Open circuit Voltage Voc(V)	26.2V	21.5V	26.2V
Short circuit current Ioc(A)	4.84A	7.08A	7.27A
Module efficiency(%)	19.3%	19.7%	20.1%
Module dimension	760x680x30mm	800x760x30mm	980x760x30mm
Solar cells	Mono 182x60.6	Mono 182x91	Mono 182x91
Cells orientation	40(4x10)	32(4x8)	40(4x10)
Weight	5.1kg±5%	5.8kg±5%	7.2kg±5%

\*STC(Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, AM 1.5

\*The data above is for reference only and the actual data is in accordance with the practical testing

## ELECTRICAL DATA NOCT \*

Module type	SM100M	SM120M	SM150M
Maximum power pmax(Wp)	74.6W	89.5W	111.9W
Maximum power point voltage Vmp(V)	20.2V	16.3V	20.2V
Maximum power point current Imp(A)	3.69A	5.5A	5.53A
Open circuit Voltage Voc(V)	23.2V	18.6V	23.2V
Short circuit current Ioc(A)	4.18A	6.39A	6.27A

\*NOCT(Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, AM 1.5

\*The data above is for reference only and the actual data is in accordance with the practical testing

## TEMPERATURE RATINGS

NOCT	43°C ±2°C
Temperature coefficient of Pmax	-0.36%/K
Temperature coefficient of Voc	-0.28%/K
Temperature coefficient of Isc	0.05%/K

## Mechanical Characteristics

Glass	High transparency, low iron, tempered
Junction box	IP 66, 3 diodes
Cables	2.5mm <sup>2</sup> , 600mm
Connectors	MC4-compatible


## WORKING CONDITIONS

Maximum system voltage	1000 /1500 V DC
Operating temperature	-40°C ~+85°C
Maximum series fuse	15A
Maximum load(snow/wind)	5400 Pa / 2400 Pa


## PACKAGING INFORMATION

Packing type	carton
Box	2pcs/box

## PACKAGING INFORMATION

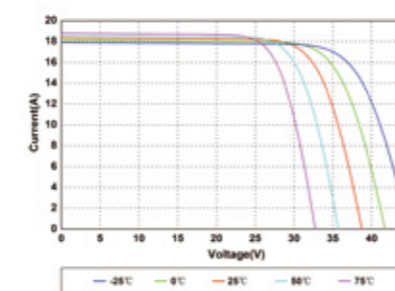

Current-Voltage and Power-Voltage Curves at Different Irradiances

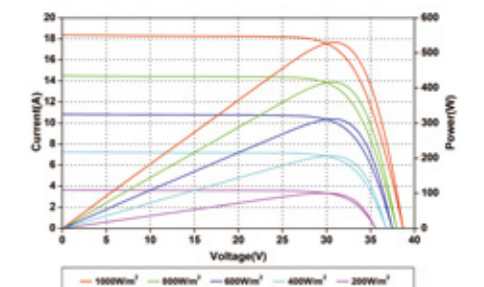


Current-Voltage Curves at Different Temperatures


SunMaster 5

# SM50-90M

182mm Cells Mono  
PERC with MBB & Half-cut  
Technology

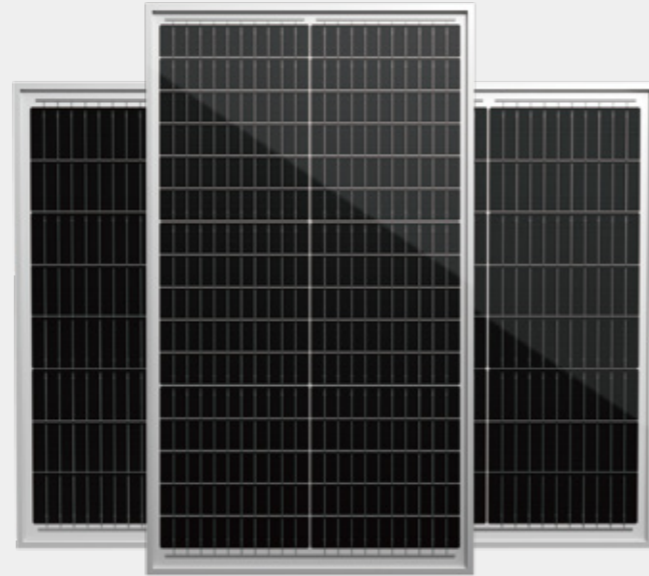

## Quality Guarantee

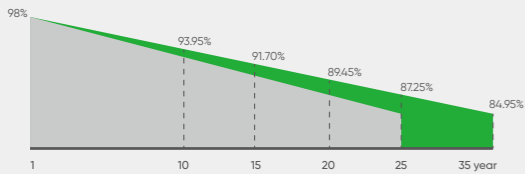

▶ Sunmaster solar linear power output guarantee  
▶ Standard linear power output guarantee

# 50-90W

-0.55%  
power attenuation

30years  
Power warranty

## Comprehensive Products and System Certificates



IEC 61215 / IEC 61730 / CE / INMETRO

ISO 9001-

2015/Quality management system

ISO 14001-

2015/Standards for environmental management system

ISO 45001-

2018/International standards for occupational health & safety

## Key Features

- High Power Output:** Mono crystalline 28-cell module achieves a power output up to 40Wp.
- PID RESISTANT:** SunMaster modules pass PID test, limited power degradation by PID test is guaranteed for mass production.
- Low-light Performance:** Advanced glass and surface texturing allow for excellent performance in low-light environments.
- Severe Weather Resilience:** Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).
- Durability against extreme environmental conditions:** With high salt mist and ammonia resistance.
- Temperature Coefficient:** Improved temperature coefficient decreases power loss during high temperatures.

## ELECTRICAL DATA (STC)\*

Module type	SM50M	SM60M	SM70M	SM80M	SM90M
Nominal power watt Pmax(W)	50W	60W	70W	80W	90W
Power output tolerance Pmax(%)	0~+5%				
Maximum power voltage Vmp(V)	18.5V	18.5V	18.5V	18.5V	20.8V
Maximum power current Imp(A)	2.71A	3.25A	3.79A	4.32A	4.33A
Open circuit Voltage Voc(V)	21.5V	21.5V	21.5V	21.5V	23.8V
Short circuit current Ioc(A)	2.95A	3.54A	4.13A	4.72A	4.08A
Module efficiency(%)	18.6%	18.3%	17.0%	19.1%	19.4%
Module dimension	660x400x20mm	760x430x20mm	760x540x30mm	760x540x30mm	760x610x30mm
Solar cells	Mono 182x36.4	Mono 182x36.4	Mono 182x60.6	Mono 182x60.6	Mono 182x60.6
Cells orientation	32(2x16)	32(2x16)	32(4x8)	32(4x8)	36(4x9)
Weight	2.5kg±5%	3.2kg±5%	4kg±5%	4kg±5%	4.4kg±5%

\*STC(Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, AM 1.5

\*The data above is for reference only and the actual data is in accordance with the practical testing

## ELECTRICAL DATA NOCT \*

Maximum power pmax(Wp)	37.3W	44.7W	51.8W	59.68W	66.6W
Maximum power point voltage Vmp(V)	15.5V	15.5V	15.5V	15.5V	17.8V
Maximum power point current Imp(A)	2.4A	2.8A	3.35A	3.85A	3.74A
Open circuit Voltage Voc(V)	19.4V	19.4V	18.5V	18.5V	20.8V
Short circuit current Ioc(A)	2.49A	2.99A	3.64A	4.19A	4.16A

\*NOCT(Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, AM 1.5

\*The data above is for reference only and the actual data is in accordance with the practical testing

## TEMPERATURE RATINGS

NOCT	43°C ±2°C
Temperature coefficient of Pmax	-0.36%/K
Temperature coefficient of Voc	-0.28%/K
Temperature coefficient of Isc	0.05%/K

## Mechanical Characteristics

Glass	High transparency, low iron, tempered
Junction box	IP 66, 3 diodes
Cables	2.5mm <sup>2</sup> , 600mm
Connectors	MC4-compatible


## WORKING CONDITIONS

Maximum system voltage	1000 /1500 V DC
Operating temperature	-40°C ~+85°C
Maximum series fuse	15A
Maximum load(snow/wind)	5400 Pa / 2400 Pa


## PACKAGING INFORMATION

Packing type	carton
Box	2pcs/box

## PACKAGING INFORMATION

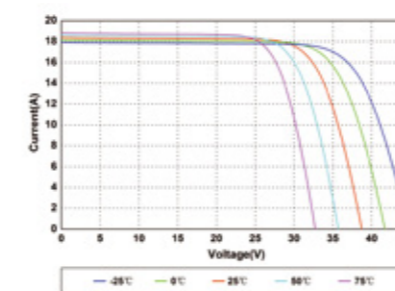

Current-Voltage and Power-Voltage Curves at Different Irradiances

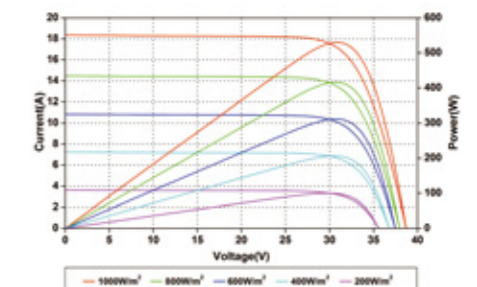


Current-Voltage Curves at Different Temperatures

SunMaster 6


# SM10-40M

182mm Cells Mono  
PERC with MBB & Half-cut  
Technology

## Quality Guarantee

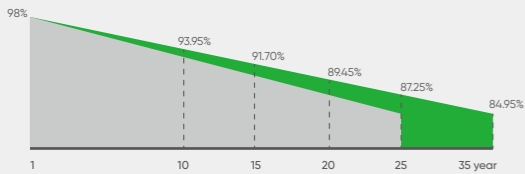

▶ Sunmaster solar linear power output guarantee  
▶ Standard linear power output guarantee

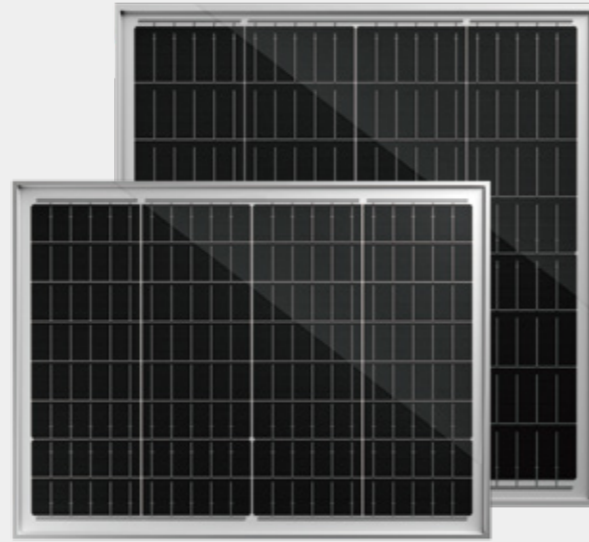

# 10-40W

-0.55%  
power attenuation

30years  
Power warranty

Comprehensive  
Products and System Certificates



IEC 61215 / IEC 61730 / CE / INMETRO

ISO 9001-

2015/Quality management system

ISO 14001-

2015/Standards for environmental management system

ISO 45001-

2018/International standards for occupational health & safety

## Key Features

**High Power Output:**  
Mono crystalline 28-cell module achieves a power output up to 40Wp.

**PID RESISTANT:**  
SunMaster modules pass PID test, limited power degradation by PID test is guaranteed for mass production.

**Low-light Performance:**  
Advanced glass and surface texturing allow for excellent performance in low-light environments.

**Severe Weather Resilience:**  
Certified to withstand wind load (2400 Pascal) and snow load (5400 Pascal).

**Durability against extreme environmental conditions:**  
With high salt mist and ammonia resistance

**Temperature Coefficient:**  
Improved temperature coefficient decreases power loss during high temperatures.

## ELECTRICAL DATA (STC)\*

Module type	SM10M	SM20M	SM30M	SM40M
Nominal power watt Pmax(W)	10W	20W	30W	40W
Power output tolerance Pmax(%)	0~+5%	0~+5%	0~+5%	0~+5%
Maximum power voltage Vmp(V)	18V	18.5V	18.1V	16.2V
Maximum power current Imp(A)	0.56A	1.09A	1.1A	2.47A
Open circuit Voltage Voc(V)	21V	22.5V	22.5V	19.2V
Short circuit current Ioc(A)	0.59A	1.13A	1.9A	2.75A
Module efficiency(%)	16.7%	16.7%	17.4%	16.9%
Module dimension	260x240x20mm	400x300x20mm	420x400x20mm	590x400x20mm
Solar cells	Mono 45.5x23.3	Mono 91x30.3	Mono 91x45.5	Mono 182x36.4
Cells orientation	36(4x9)	32(4x8)	32(4x8)	28(2x14)
Weight	0.5kg±5%	1.1kg±5%	1.3kg±5%	2.2kg±5%

\*STC(Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Module Temperature 25 °C, AM 1.5

\*The data above is for reference only and the actual data is in accordance with the practical testing

## ELECTRICAL DATA NOCT \*

Maximum power pmax(Wp)	7.4W	14.9W	22.4W	29.8W
Maximum power point voltage Vmp(V)	15V	15.5V	16.1V	13.2V
Maximum power point current Imp(A)	0.49A	0.93A	1.4A	2.25A
Open circuit Voltage Voc(V)	18V	18.7V	19.4V	16.2V
Short circuit current Ioc(A)	0.52A	1.06A	1.46A	2.33A

\*NOCT(Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20 °C, AM 1.5

\*The data above is for reference only and the actual data is in accordance with the practical testing

## TEMPERATURE RATINGS

NOCT	43 °C ±2 °C
Temperature coefficient of Pmax	-0.36%/K
Temperature coefficient of Voc	-0.28%/K
Temperature coefficient of Isc	0.05%/K

## WORKING CONDITIONS

Maximum system voltage	1000 /1500 V DC
Operating temperature	-40 °C ~+85 °C
Maximum series fuse	10A/15A
Maximum load(snow / wind)	5400 Pa / 2400 Pa


## Mechanical Characteristics

Glass	High transparency, low iron, tempered
Junction box	IP 66, 3 diodes
Cables	2.5mm <sup>2</sup> , 600mm
Connectors	MC4-compatible


## PACKAGING INFORMATION

Packing type	carton
Box	2pcs/box

## PACKAGING INFORMATION

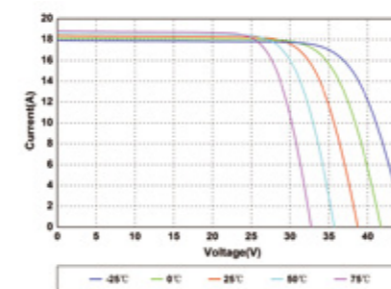

Current-Voltage and Power-Voltage Curves at Different Irradiances

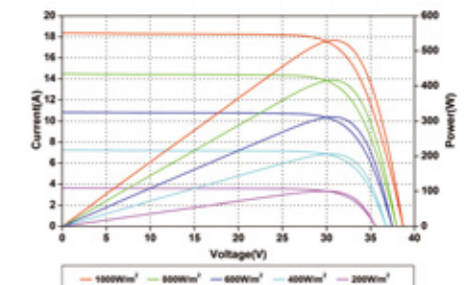

Current-Voltage Curves at Different Temperatures